





VESTA

V2000-3H-1C

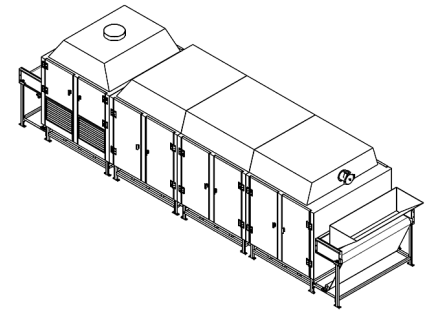

Dimensions

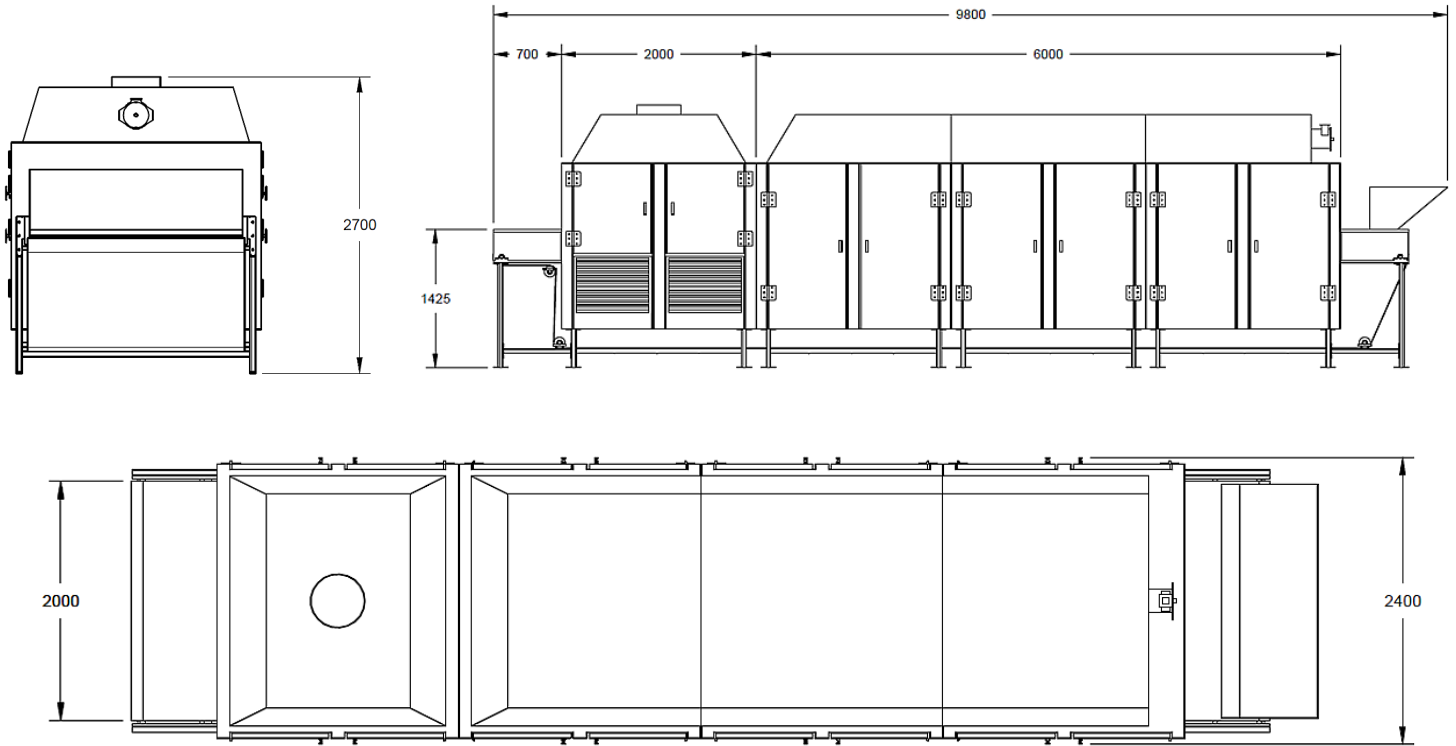

Throughput Ranges

The table below is calculated on a nut roast for a product @ 467kg/m³ with a roast time of 15 minutes.

| Bed Depth (mm) | Throughput (Kg/Hr) |
|----------------|--------------------|
| 25 | 560 |
| 50 | 1121 |
| 75 | 1681 |
| 100 | 2242 |
| 125 | 2802 |

Additional Information

| Specifications | V2000-3H-1C |
|----------------------------------|----------------------------------|
| Bed Depth Range | 25mm to 125mm |
| Residence Time Range | 6 minutes to 60 minutes |
| Heat Capacity Range (typically)* | 18kW to 525kW |
| Steel (Structural Material) | Stainless Steel, 304 & 316 Grade |
| Belt Width | 2000mm Stainless Steel Mesh Belt |

* Actual Heat Capacity range is determined and will vary for each client's individual requirements. This is a guide only.